

# AMERI- CANA<sup>TM</sup>

*& CANADIANA*

*ROOFING AND SIDING PANELS*

**USA  
MetalRoof.com**



**SOLID STEEL STRENGTH**






# AMERI-CANA™ PANEL



## SUPERIOR STRENGTH AND VERSATILITY

Ideal Roofing's Ameri-Cana roofing and siding panel offers superior strength with its **strong 80,000 psi full-hard steel core** and its 5 specially-designed 3/4"-high ribs spaced every 9 inches. Superior strength means savings on wood or steel purlins for the builder. Please consult the following load tables.

### "OUR RIBS ARE BETTER!"



The ribs on the Ameri-Cana panel are reinforced to better accommodate fasteners. With its symmetrical pattern and ribs with steeper angles, the Ameri-Cana panel is considered the ultimate roofing or siding panel for agricultural, commercial or industrial buildings as well as for residential roofing applications.

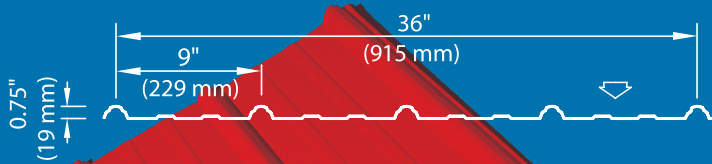

## WEATHERTIGHT OVERLAP

Ideal Roofing's Ameri-Cana panel offers maximum protection against leakage with its built-in anti-siphon groove to counter water infiltration resulting from capillary action. This feature makes the Ameri-Cana panel "ideal" for use as a roofing sheet for long and low rafters with a roof pitch as low as 3/12.

## UNIFORMLY DISTRIBUTED LOADS (LBS/FT²) FOR TRIPLE SPAN CONDITION

(Tested Under AsTm e72-05)

|                  | 18" | 24" | 30" | 36" | 42" | 48" |
|------------------|-----|-----|-----|-----|-----|-----|
| 29 gauge (.016") | 304 | 171 | 95  | 67  | 49  | 38  |
| 26 gauge (.021") | 423 | 237 | 135 | 87  | 63  | 48  |



Roofing: Ameri-Cana



Roofing: Ameri-Cana



Roofing & Siding: Ameri-Cana


## 4 COATS OF PROTECTION FOR LONGER LIFE

- 1 ZINC COAT (GALV G-90)
- 2 ZINC PHOSPHATE TREATMENT
- 3 PRIMER COAT
- 4 PERSPECTRA PLUS SERIES™ / WEATHER XL™

### 40 YEAR LIMITED WARRANTY

#### YOUR CHOICE OF MATERIAL \*APPLICABLE ONLY ON THE AMERI-CANA


| GALVANIZED STEEL (MILL FINISH)   | GALVALUME PLUS (MILL FINISH)                                | PRE-PAINTED GALVANIZED STEEL   | *ALUMINUM DIAMOND EMBOSSED |
|--|---|--|----------------------------|
| AsTm-A653 ss<br>grade 80, Z275 (g-90);<br>gauges: 29 (.016" thick)<br>and 26 (.021" thick) | AsTm-A792 ss<br>grade 80, AZ165;<br>gauge: 29 (.016" thick) | Perspectra PLUS series™ /<br>Weather XL™: see color<br>chart; AsTm-A653 ss<br>grade 80, Z275 (g-90);<br>gauges: 29 (.016" thick)<br>and 26 (.021" thick) | gauge: 25 (.0175" thick)   |

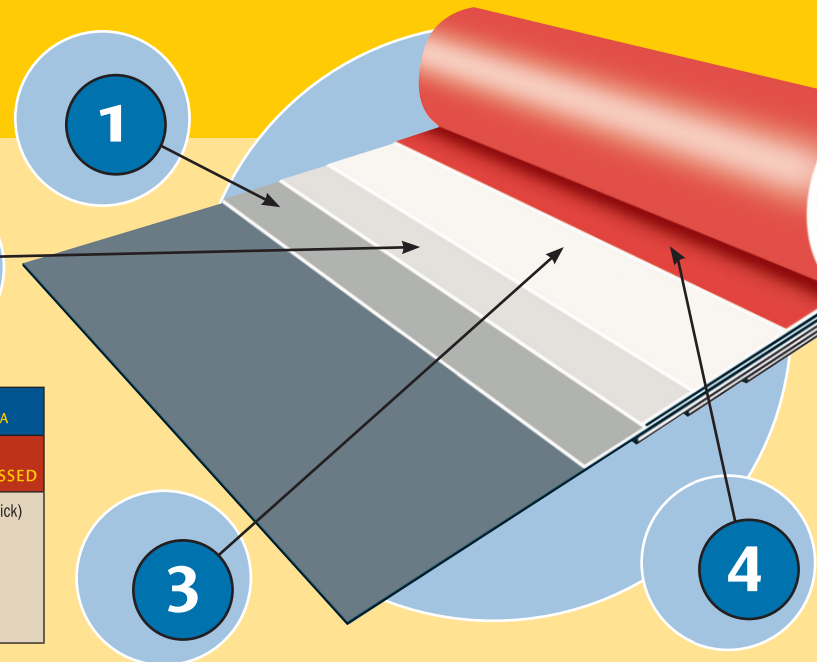

# CANADIANA SIDING PANEL


## SUPERIOR STRENGTH STEEL SIDING

The Canadiana panel is destined to become the industry's most versatile lightweight steel siding panel with its strong full-hard steel core 80,000 psi and its seven 5/8"-high ribs spaced every 6 inches.



### "... COVERS A WIDER AREA"

Economically formed from a 41-in.-wide steel coil to a final 36-in. ribbed sheet, this panel covers a wider area than other siding panels. Consider the aesthetic and structural qualities of our Canadiana steel siding panel for exterior and interior use on agricultural, commercial and industrial buildings.

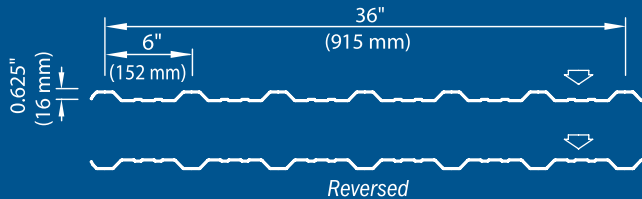

## UNIFORMLY DISTRIBUTED LOADS (LBS/FT<sup>2</sup>) FOR TRIPLE SPAN CONDITION


(Theoretical data)

|                  | 18" | 24" | 30" | 36" | 42" | 48" |
|------------------|-----|-----|-----|-----|-----|-----|
| 29 gauge (.016") | 213 | 120 | 77  | 53  | 36  | 24  |
| 26 gauge (.021") | 321 | 180 | 115 | 80  | 51  | 34  |

normal occupancy

|                  | 18" | 24" | 30" | 36" | 42" | 48" |
|------------------|-----|-----|-----|-----|-----|-----|
| 29 gauge (.016") | 266 | 150 | 97  | 66  | 45  | 30  |
| 26 gauge (.021") | 401 | 225 | 144 | 100 | 64  | 43  |

Low Human occupancy (Farm Buildings)

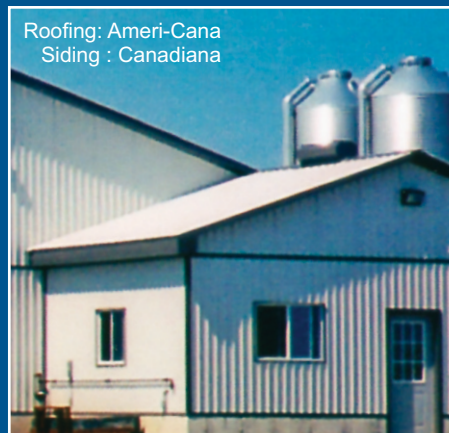

## 20 ATTRACTIVE COLORS TO ENHANCE YOUR BUILDINGS


Colors not exactly as shown. See color card.




Dark Brown ID 8229



Tile Red ID 8259




Burgundy ID 8011



Polar White ID 8783




Heron Blue ID 8330



White ID 8317




Bone White ID 8273




Antique Linen ID 8696



Tan ID 8315



Stone Grey ID 8305




Regent Grey ID 8730



Bright Red ID 8386



Red ID 8250



Slate Blue ID 8260




Royal Blue ID 8790




Medium Green ID 8329




Forest Green ID 8307



Charcoal ID 8306



Coffee ID 8326




Black ID 8262

## TIME AND MONEY SAVERS

Both the Ameri-Cana and Canadiana panels save you time and money! Time because you install wider sheets covering 36-inches that are custom-cut to the inch in lengths measuring up to 40 feet, for your convenience. You save money because the Ameri-Cana and Canadiana panels are made from a 41-in.-wide flat steel sheet with considerably less metal waste than any other high-rib profile.



# FLASHINGS, TRIMS, FASTENERS AND ACCESSORIES

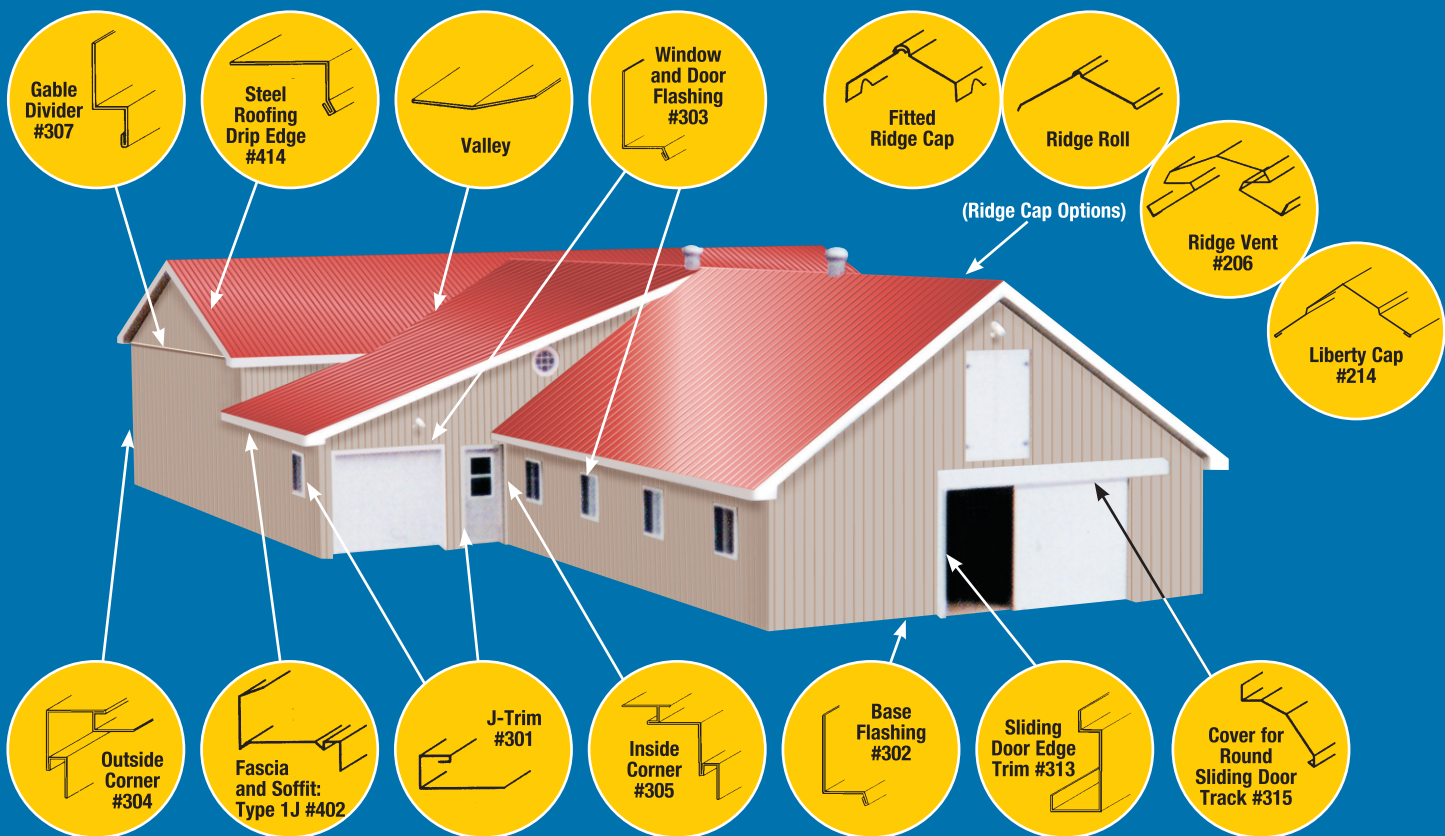

| Ideal Guard          | Ridge Roll, 10' lengths | Valley 18", 24", 36" | Closure Strip | Ridge Vent, 10' lengths | Fitted Ridge Cap, 6' lengths | Roll Valley Coils, 50' lengths                | SNOW DIAMOND                                     |
|----------------------|-------------------------|----------------------|---------------|-------------------------|------------------------------|---|--|
|                      |                         |                      |               |                         |                              |   |  |
| Fitted Wall Flashing | "Z" Bar                 | "U" Channel          | Omega Bar     | Touch-up paint          | Screw with neoprene washer   | #14 Self-drilling screw with 7/16" nylon head | #12-#14 Self-drilling screw with neoprene washer |
|                      |                         |                      |               |                         |                              |   |  |

To add the finishing touch, Ideal Roofing fabricates all its flashing and trims in all colors and materials.

UL 580 (Class 90), Wind Uplift Resistance (check our website for installation details).



**USA Metal Roof LLC**

Tel.201-293-9690, Fax 800-716-7639

E-mail: [office@usametalroof.com](mailto:office@usametalroof.com)

[www.USAMetalRoof.com](http://www.USAMetalRoof.com)

